



BAS116

REMOVABLE STEEL BOLLARD

PRODUCT DATA SHEET

ISSUE 01 | 2026

REMOVABLE ACCESS CONTROL. SECURE WHEN REQUIRED.

Padlock-operated system

The BAS116 provides lockable vehicle access control while allowing the bollard to be removed when authorised access is required.

FLEXIBLE, LOCKABLE PROTECTION

A heavy-duty powder-coated safety-yellow removable steel bollard with a below-ground sleeve. It provides clear traffic delineation and asset protection while retaining controlled vehicle access.

**REMOVABLE**
SLEEVE

**GALVANISED**
STEEL


**PADLOCK**
SECURE

TECHNICAL SPECIFICATION

PRODUCT CODE	BAS116
LOCKING SYSTEM	Padlock
MATERIAL	Galvanised steel
FINISH	Safety yellow powder coat
REFLECTIVE BAND	Red
ABOVE-GROUND HEIGHT	1200 mm
IN-GROUND SLEEVE	250 mm
TOTAL LENGTH	1450 mm
OUTSIDE DIAMETER	140 mm
WALL THICKNESS	3 mm
APPROX. WEIGHT	10 kg
WARRANTY	2 years

INSTALLATION DETAIL

TYPICAL REMOVABLE SYSTEMNOT TO SCALE

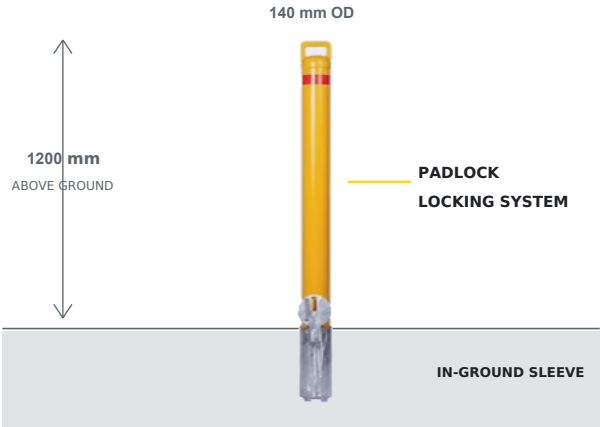

140 mm OD

1200 mm
ABOVE GROUND

PADLOCK
LOCKING SYSTEM

IN-GROUND SLEEVE

SLEEVE DEPTH: 250 mm

TOTAL PRODUCT LENGTH: 1450 mm

TYPICAL APPLICATIONS

- Controlled vehicle access and restricted areas
- Driveways, car parks, loading and service zones
- Temporary access points requiring removable protection

INSTALLATION GUIDANCE

Install the sleeve plumb in a suitable reinforced concrete footing. Keep the sleeve top flush with the finished surface and provide drainage where required. Check operation before concrete fully cures.

Footing design must suit ground conditions, traffic and design loads.