


Fully retractable bollard

114 mm | 304 stainless steel | Keyed alike

BAR-X1

TECHNICAL SPECIFICATIONS

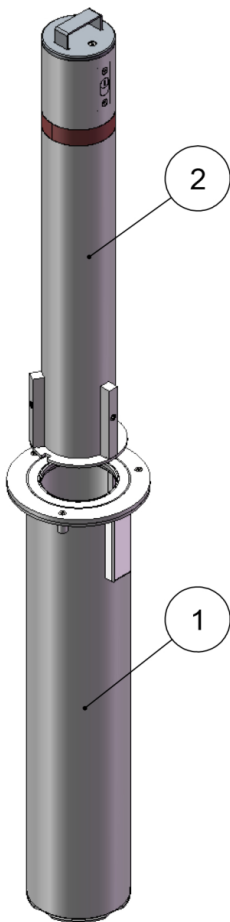

Assembly view

Material	304 grade stainless steel
Surface finish	Satin polish
Bollard diameter	114 mm
Bollard height	900 mm
Wall thickness	3 mm
Reflective tape	Yellow oval reflective tape strip
Keys	2 keys included; keyed alike
Fixings	Included
Housing length	1,082 mm
Housing diameter	159 mm
Top flange diameter	220 mm
Assembly weight	21.6 kg

INSTALLATION HOLE DEPTH

Recommended minimum drilled installation hole depth: **1,150 mm**.


Dimensions are in millimetres. Refer to the technical views on page 2.

BOLLARDS ADELAIDE


PRODUCT DATA SHEET / BAR-X1

Dimensions & technical views


All dimensions in mm. Drawings not to scale.

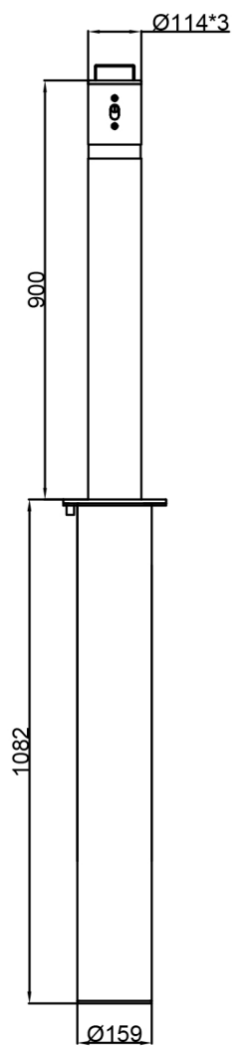

Front View

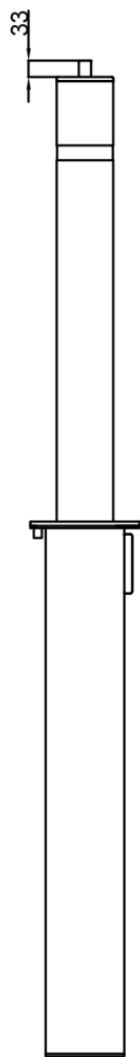


Left View



Top View

FRONT & TOP VIEWS

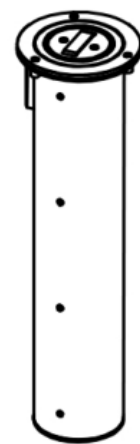


Graphic Model

RETRACTED VIEW


Component details

Exploded bollard assembly and below-ground housing

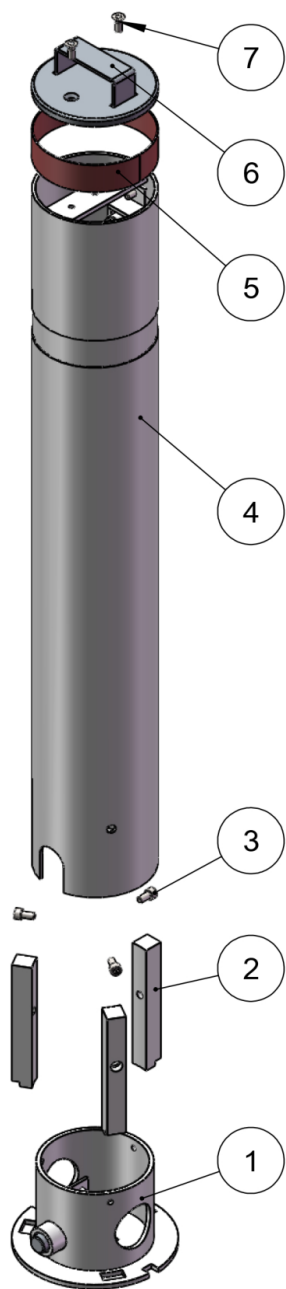

RETRACTABLE BOLLARD

Component weight: 9.0 kg

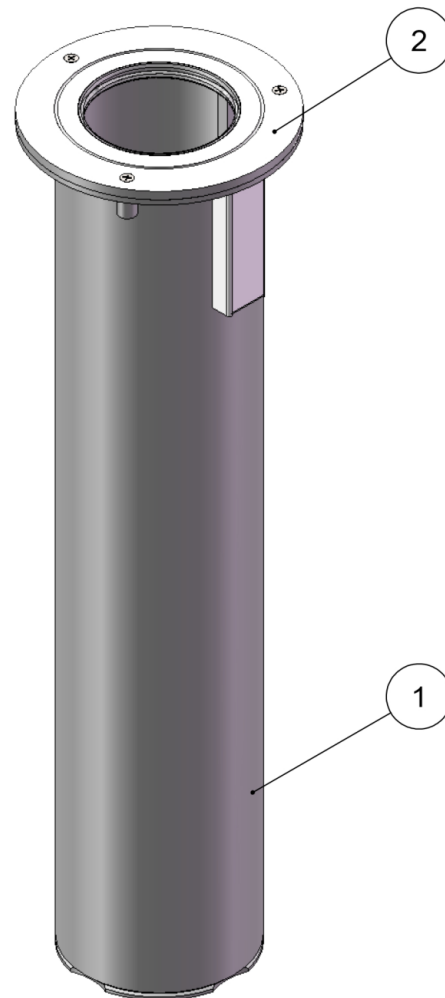

BELOW-GROUND HOUSING

Component weight: 12.6 kg